

indiana line

Nel disegnare i modelli Puro, non abbiamo mai cercato soluzioni per impressionare al momento, ma eleganti forme senza tempo: sono prodotti fatti per offrire il massimo delle prestazioni per decenni. Gli amplificatori ed il lettore di compact disc Puro sono caratterizzati dall'invidiabile neutralità timbrica e dalla naturalezza nella riproduzione delle voci, con una capacità dinamica che va ben oltre le loro caratteristiche nominali.

By designing the models Puro, we have never looked for solutions to impress at the moment, but for elegant and timeless shapes: our products are made to offer the highest performance for decades. Puro amplifiers and compact disc player are characterized by excellent tonal neutrality and voice naturalness, with a dynamic capability that goes far beyond their nominal data.

PURO





PURO CDP

compact disc player
 frequency response 20 ÷ 20000 Hz +/- 0.5 dB
 THD 0.002% @ 1 kHz
 digital/analog converter 24 bit / 192 kHz
 signal noise ratio > 110 dB A weighted
 channel separation > 102 dB @ 1 kHz
 dynamic range > 95 dB

analogic output 2.2 Vrms / 100 ohm
 coaxial digital output 500 mVpp / 75 ohm
 optical digital output JEITA CP-1212


power supply 220 ÷ 240 VAC / 50 Hz
 power consumption 30 W max
 dimensions 430 x 88 x 325 mm
 weight 5.6 kg
 remote control included

PURO

remote control
 type infrared
 batteries 2 x AAA (1.5 V)
 dimensions 45 x 206 x 19 mm
 weight 150 g

indiana line

All'interno dei loro solidi telai, i modelli Puro custodiscono circuiti stampati a doppia faccia con fori metallizzati, sui quali sono montati componenti selezionati tra cui il generoso trasformatore toroidale e l'affidabile meccanica del lettore CD, adeguatamente protetto da uno schermo metallico. Il layout è stato studiato nei più piccoli dettagli, per garantire il percorso più breve possibile del segnale. Entrambi gli amplificatori sono dotati di ingresso phono MM e di by-pass, per collegare il mondo degli audiofili con quello home cinema; per il collegamento veloce di una sorgente portatile, troviamo una presa mini-jack sul pannello frontale. Inoltre, Puro 800 è dotato di un convertitore DAC interno di elevata qualità e di tre ingressi digitali: coassiale, ottico e USB. L'uso degli apparecchi è facile ed intuitivo, nonostante la completezza delle loro funzioni.

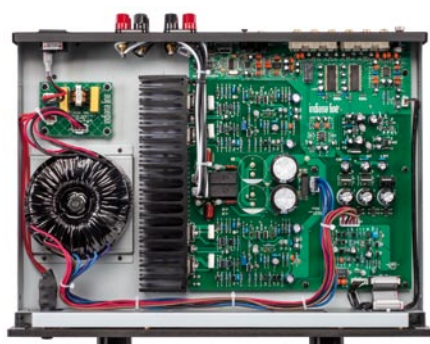

PURO 800

power (THD 0,1%)

frequency response

THD

signal noise ratio

input sensitivity

pre output

digital/analog converter

power supply

power consumption

dimensions

weight

remote control

DAC stereo integrated amplifier

80 watt rms / 2 channel driven (8 ohm)

110 watt rms / 2 channel driven (4 ohm)

10 ÷ 80000 Hz +/- 0.5 dB

20 ÷ 20000 Hz +/- 0.5 dB (Phono)

0.006% @ 1 kHz (80% nominal power)

> 92 dB A weighted (CD, Aux)

> 82 dB A weighted (MM Phono)

400 mV / 47 kohm

1.2 mV (MM Phono)

750 mV / 600 ohm

24 bit / 192 kHz

500 mVpp / 75 Ohm coaxial input

JEITA CP-1212 optical input

32 ÷ 96 KHz USB input sampling rate

220 ÷ 240 VAC / 50 Hz

280 W max

430 x 88 x 345 mm

8.2 kg

included

Inside the solid chassis, the Puro models preserve double-sided printed circuit boards with through plated holes, on which selected components are mounted as the generous toroidal transformer and the reliable CD player mechanics, adequately protected by a metal shield. The layout has been designed in the smallest details to ensure the shortest possible signal paths. Both amplifiers feature MM phono input and by-pass, to link the world of audiophiles with the home cinema; for fast connection to a portable source, we find a mini-jack input on the front panel. Furthermore, Puro 800 is equipped with a high-quality internal D/A converter and three digital inputs: coaxial, optical and USB. The use of equipment is easy and instinctive, despite the completeness of their functions.



| | |
|--------------------|--|
| PURO 500 | stereo integrated amplifier |
| power (THD 0,1%) | 50 watt rms / 2 channel driven (8 ohm) 75 watt rms / 2 channel driven (4 ohm) |
| frequency response | 10 ÷ 80000 Hz +/- 0.5 dB 20 ÷ 20000 Hz +/- 0.5 dB (Phono) |
| THD | 0.01% @ 1 kHz (80% nominal power) |
| signal noise ratio | > 90 dB A weighted (CD, Aux) > 81 dB A weighted (MM Phono) |
| input sensitivity | 400 mV / 47 kohm 1.2 mV (MM Phono) |
| pre output | 750 mV / 600 ohm |
| power supply | 220 ÷ 240 VAC / 50 Hz |
| power consumption | 190 W max |
| dimensions | 430 x 88 x 345 mm |
| weight | 7.2 kg |
| remote control | included |

